
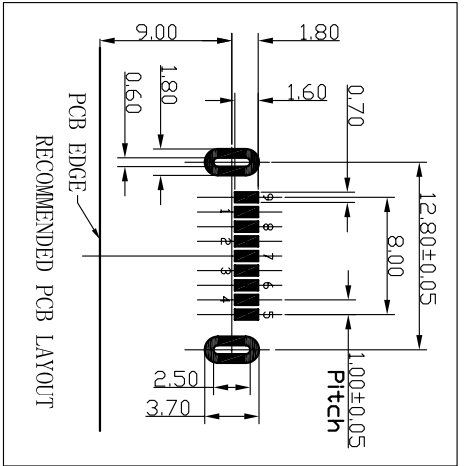
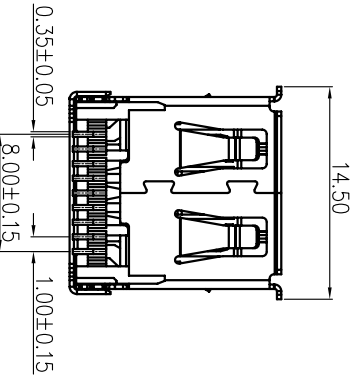
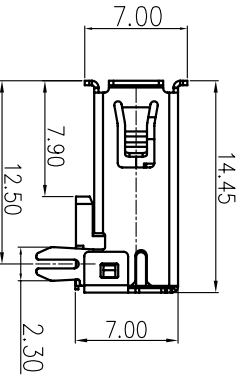
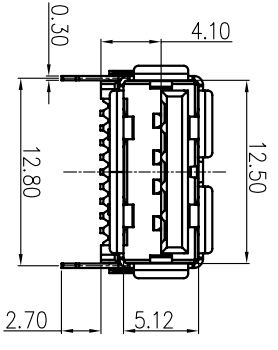




REV.	ECN NO.	APPD.
A	/	LXQ



NOTE:

- MATERIAL:
  - INSULATOR: LCP+30%GF UL 94V-0 BLUE 300C
  - CONTACT: C2680R-H
  - SHELL: BRASS
- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 30mΩ MAXIMUM
  - CONTACT CURRENT RATING: 1.5A
  - DIELECTRIC WITHSTANDING VOLTAGE: 100 V AC R.M.S.
  - INSULATION RESISTANCE 100 MEGOHMS MIN
  - OPERATING TEMPERATURE: -55° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
  - MATING FORCE: 3.57kgf MAX
  - UNMATED FORCE: 0.82kgf MIN AFTER TEST
  - DURABILITY MANDATORY: 5,000 CYCLES
- PLATING
  - TERMINAL:
    - 40u" MIN NICKEL ALL OVER
    - 40u" MIN TIN ON SOLDER AREA
    - 1u" Au ON CONTACT AREA
  - SHELL: 40u" MIN NICKEL ALL OVER

- U322-013X-XXXXX1
- 1: Iron alloy
  - Ni plating
  - 5: Copper alloy
  - Ni plating
  - 1: Au 1u"
  - 3: Au 3u"
  - 5: Au 5u"
  - 7: Au 10u"
  - 8: Au 15u"
  - A: Au 30u"
  - 1: PA66
  - 2: PBT
  - 6: LCP
  - 1: troy
  - 2: Tube
  - 8: Tape&Reel
  - 9: Tape&Reel+Mylar
  - 1: Black
  - 7: Blue 300C
  - 8: Blue 300C-1
  - C: Blue 300C-2
  - E: Blue 300C-3
  - 9: Carbon black 425C

深圳市虹康科技有限公司

PART NAME: USB 3.0 AF SMT 鱼叉脚

PART No: SHK-30136

DATE: 2014.12.6

DATE	DRAWN	CHECKED	APPROVED
2014.12.6	雷先强		

UNIT:	SCALE	SHEET	REV.
mm	1:1	10F1	A